


道路用鉄筋コンクリート側溝

1種 歩道用
3種 T-25

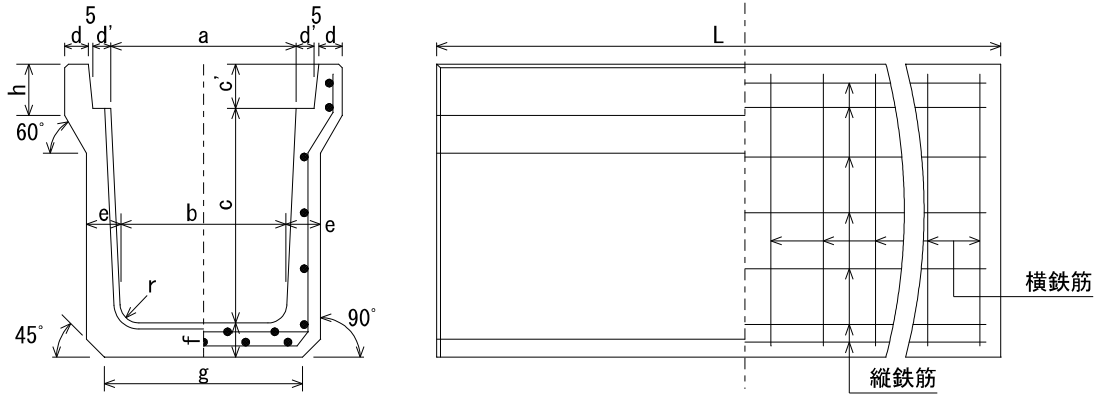

種類	呼び名	寸法 (mm)												横鉄筋				縦鉄筋	参考重量 (kg)	
		a	b	c	c'	d	d'	e	f	g	h	r	L	外側 径 本	内側 径 本	径 本	径 本			
1種	250	250	230	250	90	40	55	55	55	300	120	50	2000	4	10			4	11	271
	300A	300	280	300	95	40	55	60	60	360	120	50	2000	4	10			4	11	320
	300B	300	270	400	95	40	55	65	65	360	120	50	2000	4	10			4	13	392
	300C	300	260	500	95	40	55	70	70	360	120	50	2000	5	10			4	15	469
	400A	400	370	400	110	40	55	65	65	460	135	50	2000	5	10			4	14	425
	400B	400	360	500	110	40	55	70	70	460	135	50	2000	5	10			4	16	504
	500A	500	460	500	125	45	60	70	70	560	150	50	2000	5	10			4	17	552
	500B	500	450	600	125	45	60	75	75	560	150	50	2000	6	10			4	21	639
3種	250	250	230	250	90	45	55	65	65	300	120	50	2000	5	20	5	20	4	13	307
	300A	300	280	300	95	50	55	70	70	360	140	50	2000	5	24	5	24	4	13	390
	300B	300	270	400	95	50	55	70	70	330	140	50	2000	D6	19	D6	10	4	15	451
	300C	300	260	500	95	50	55	80	80	340	140	50	2000	D6	21	D6	11	4	17	556
	400A	400	370	400	110	55	55	70	70	430	140	50	2000	D6	23	D6	12	4	17	504
	400B	400	360	500	110	55	55	80	80	440	140	50	2000	D6	23	D6	12	4	19	611
	500A	500	460	500	125	60	60	80	80	540	155	50	2000	D6	23	D6	12	4	20	685
	500B	500	450	600	125	60	60	90	90	550	155	50	2000	D6	25	D6	13	4	24	837